

Dynamic User Optimal Assignment with Physical Queues for a Many-to-Many OD Pattern

多起点多終点 OD における渋滞延伸を考慮した動的利用者最適交通量配分

Masao KUWAHARA* and Takashi AKAMATSU**

桑原雅夫・赤松 隆

1. Introduction

This research discusses the formulation and a solution algorithm of the dynamic user optimal assignment considering effects of physical queues with a given many-to-many OD pattern. In the dynamic user optimal assignment which is sometimes called the reactive assignment, vehicles are assumed to choose their routes based on present instantaneous travel times.

2. Network and Traffic Demand

A network consists of links and nodes. Sequential numbers from 1 to N are allocated to N nodes. The number of links is L and a link from node i to j is denoted as link (i, j) . A time-dependent many-to-many OD demand is assumed to be given, which is denoted as

$$Q_{ij}(t) = \text{cumulative OD demand from origin } i \text{ to destination } j \text{ generated at the origin by time } t \text{ (given).} \quad (1)$$

The cumulative arrival and departure curves are defined as follows:

$$A_{ij}(t) = \text{the cumulative arrivals at link } (i, j) \text{ by time } t, \quad (2)$$

$$D_{ij}(t) = \text{the cumulative departures from link } (i, j) \text{ by time } t. \quad (3)$$

$$\lambda_{ij}(t) = \text{the arrival rate at link } (i, j) \text{ at time } t = dA_{ij}(t)/dt, \quad (4)$$

$$\mu_{ij}(t) = \text{the departure rate from link } (i, j) \text{ at time } t = dD_{ij}(t)/dt. \quad (5)$$

The $A_{ij}(t)$ and $\lambda_{ij}(t)$ are unknown variables which must be determined so as to establish the DUO assignment principle defined later.

3. Constraints

3.1 Flow Conservation at Nodes

The first constraint is the flow conservation at a node:

$$-\sum_k D_{ki}^d(t) + \sum_j A_{ij}^d(t) - Q_{id}(t) = 0, \quad i = 1, 2, \dots, N, \quad i \neq d. \quad (6)$$

$A_{ij}^d(t)$ = the cumulative arrivals at link (i, j) to destination d by time t ,

$D_{ij}^d(t)$ = the cumulative departures from link (i, j) to destination d by time t .

3.2 First In First Out Discipline

Second, under the FIFO discipline, a vehicle must leave link (i, j) in the same order as its order of arrival at the link. Thus, the $A_{ij}(t)$ and $D_{ij}(t)$ must be related to each other through link travel time $T_{ij}(t)$:

$$A_{ij}(t) = D_{ij}(t + T_{ij}(t)) \quad \text{or} \quad A_{ij}^d(t) = D_{ij}^d(t + T_{ij}(t)) \quad (7)$$

where $T_{ij}(t)$ = travel time on link (i, j) for a vehicle entering the link at time t . Therefore, the link travel time $T_{ij}(t)$ is written as a function of $A_{ij}(t)$ and $D_{ij}(t)$ ^{1),2)}:

$$T_{ij}(t) = D_{ij}^{-1}(A_{ij}(t)) - t \quad \text{or} \quad T_{ij}(t) = D_{ij}^{d-1}(A_{ij}^d(t)) - t. \quad (8)$$

The derivative of (7) is obtained as

$$\lambda_{ij}^d(t) = \mu_{ij}^d(t + T_{ij}(t)) (1 + dT_{ij}(t)/dt),$$

where $\lambda_{ij}^d(t) = dA_{ij}^d(t)/dt$ and $\mu_{ij}^d(t) = dD_{ij}^d(t)/dt$.

* 5th Department, Institute of Industrial Science, University of Tokyo

** Toyohashi University of Technology

研究速報

Since $\sum_j \mu_{ij}^d(t) = \mu_{ij}(t)$, eventually the departure rate becomes:

$$\mu_{ij}^d(t + T_{ij}(t)) = \mu_{ij}(t + T_{ij}(t)) \cdot \frac{\lambda_{ij}^d(t)}{\lambda_{ij}(t)} \quad (9)$$

We clearly see the role of the FIFO discipline; that is, departure rate $\mu_{ij}^d(t + T_{ij}(t))$ is controlled not only by its arrival rate $\lambda_{ij}^d(t)$ but also by arrival rates to other destinations $\lambda_{ij}^{d'}(t)$'s, $d' \neq d$.

4. Physical Queues

Actual queues have some physical lengths. Once a link is fully occupied by a queue, the departure flow rate from the upstream link must be limited to the rate of the downstream link with the queue. To incorporate this phenomena, we have to first analyze the shock-wave speed of the congested flow and then discuss how the departure flow rate should be adjusted due to a queue downstream.

4.1 Shock-Wave Speed

To analyze the wave propagation, the following variables are introduced:

- $F_{ij}(x, t)$ = the cumulative number of vehicles passing at location x on link (i, j) by time t ,
- $f_{ij}(x, t)$ = the flow rate at location x on link (i, j) at time t ,
- $k_{ij}(x, t)$ = the density at location x on link (i, j) at time t ,

where location x means a length toward upstream from the downstream end on a link. By definition, the derivatives of flow and density are:

$$f_{ij}(x, t) = \partial F_{ij}(x, t) / \partial t, \quad (10)$$

$$k_{ij}(x, t) = \partial F_{ij}(x, t) / \partial x. \quad (11)$$

Furthermore, the flow-density relationship is assumed a triangle shape as shown in Fig.1 at any time t and location x on link (i, j) , in which the wave speed $(\partial f_{ij} / \partial k_{ij})$ is constant v_{ij} or v'_{ij} . From the flow conservation, we obtain

$$\partial k_{ij}(x, t) / \partial t = \partial f_{ij}(x, t) / \partial x. \quad (12)$$

Thus, its derivative $df_{ij}(x, t)$ is written as follows:

$$\begin{aligned} df_{ij}(x, t) &= \partial f_{ij}(x, t) / \partial t \cdot dt + \partial f_{ij}(x, t) / \partial x \cdot dx \\ &= \{ \partial f_{ij}(x, t) / \partial t + \partial f_{ij}(x, t) / \partial x \cdot dx / dt \} \cdot dt \\ &= \{ \partial f_{ij}(x, t) / \partial t + \partial k_{ij}(x, t) / \partial t \cdot dx / dt \} \cdot dt. \end{aligned}$$

On a trajectory with speed of $-dx/dt = \partial f_{ij} / \partial k_{ij}$, $df_{ij}(x, t)$ hence becomes

Flow $f_{ij}(x, t)$
[veh/unit time]

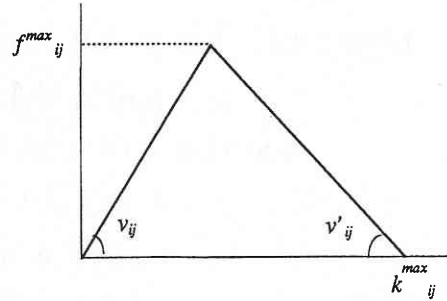


Fig. 1 A Flow-Density Relationship on link (i, j) .

$$\begin{aligned} d f_{ij}(x, t) &= \{ \partial f_{ij}(x, t) / \partial t - \partial k_{ij}(x, t) / \partial t \\ &\quad \cdot \partial f_{ij}(x, t) / \partial k_{ij}(x, t) \} \cdot dt = 0. \end{aligned} \quad (13)$$

This means that flow $f_{ij}(x, t)$ does not change on the trajectory of the backward wave. With a triangle flow-density relationship, Newell³⁾ shows an interesting property in the cumulative curve $F_{ij}(x, t)$ in relation to flow $f_{ij}(x, t)$ and density $k_{ij}(x, t)$:

$$\begin{aligned} dF_{ij}(x, t) / dx &= \partial F_{ij}(x, t) / \partial x + \partial F_{ij}(x, t) / \partial t \cdot dt/dx \\ &= k_{ij}(x, t) + f_{ij}(x, t) \cdot dt/dx \\ &= k_{ij}(x, t) - f_{ij}(x, t) \cdot dk_{ij} / df_{ij} \\ &= k_{ij}(x, t) - f_{ij}(x, t) / v'_{ij} \\ &= k_{ij}^{max}. \end{aligned} \quad (14)$$

Since the above means that $dF_{ij}(x, t) / dx$ takes the same constant value of k_{ij}^{max} independent of location x , we can draw $F_{ij}(\ell_{ij}, t)$ at the upstream end of the link by shifting $D_{ij}(t) = F_{ij}(0, t)$ horizontally by $-\ell_{ij} / v'_{ij}$ and vertically by $k_{ij}^{max} \cdot \ell_{ij}$. In Figure 2, the shifted line $D'_{ij}(t)$ is shown and the intersection of $D'_{ij}(t)$ and $A_{ij}(t)$ is known as the shock wave.

4.2 Adjustment of Departure Flow Rate

When a queue fully backs up on a link as for t_1 to t_2 in Figure 2, the departure flow rate from the upstream link must be limited up to the downstream link capacity. For point queues, the departure flow rate of vehicles leaving link (i, j) at $t + T_{ij}(t)$ (entering link (i, j) at time t) is defined using the constant link capacity μ_{ij}^* :

$$\mu_{ij}(t + T_{ij}(t)) = \begin{cases} \mu_{ij}^*, & T_{ij}(t) > \ell / v_{ij} \text{ or } \lambda_{ij}(t) > \mu_{ij}^*, \\ \lambda_{ij}(t), & \text{otherwise,} \end{cases} \quad (15)$$

On the other hand, for physical queues, the link capacity

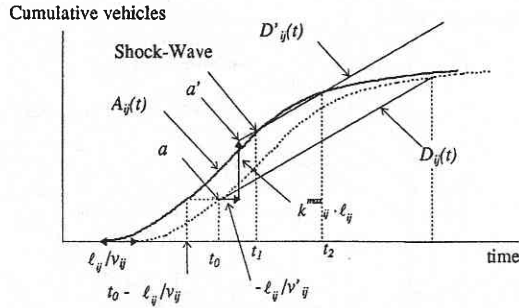


Fig. 2 Backward Wave Propagation and Vehicle Trajectories on link (i,j).

cannot be constant because it depends upon traffic condition downstream. However, the capacity would be determined based on downstream traffic condition by present time t (independent of future traffic condition). Therefore, in general, the departure flow rate $\mu_{ij}(t)$ can be written as a function of arrival rates at all links by time t :

$$\mu_{ij}(t) = \mu_{ij}(\lambda(t') \mid t' < t) \tag{16}$$

where $\lambda(t) = (\lambda_{11}(t), \lambda_{12}(t), \dots, \lambda_{ij}(t), \dots)'$,

although the explicit functional form of $\mu_{ij}(\lambda(t') \mid t' < t)$ depends on the road geometry as well as traffic condition at the downstream end of the link.

5. Dynamic User Optimal Assignment

5.1 Outline of the Assignment

Every vehicle is assumed to choose the shortest route to its destination at any time based on the present instantaneous link travel times. Let $\pi_{id}(t)$ be the shortest travel time from node i to destination d prevailing at time t , which means that $\pi_{id}(t)$ is the sum of link travel times along the shortest route p_{id} evaluated at time t : $\pi_{id}(t) = \sum_{(i,j) \in p} T_{ij}(t)$. Similar to the static assignment, the required condition for the DUO assignment is defined such that

$$\begin{cases} \pi_{id}(t) - \pi_{jd}(t) = T_{ij}(t), & \text{if a vehicle with destination } d \\ & \text{leaving node } i \text{ at time } t \text{ uses link} \\ & (i,j), \\ \pi_{id}(t) - \pi_{jd}(t) \leq T_{ij}(t), & \text{otherwise.} \end{cases} \tag{17}$$

According to the definition, the route choice of vehicles is clearly dependent only upon the instantaneous link travel times at present time t , but independent of the future link travel times. Therefore, the assignment is decomposed with

respect to present time t .

At present time t , $\lambda_{ij}^d(t')$ and $\mu_{ij}^d(t')$ are assumed to be evaluated for every link and destination for $t' < t$. Let us consider to determine $\lambda_{ij}^d(t)$ for every link and destination. From (16), $\mu_{ij}(t)$ is first determined and departure rate by destination $\mu_{ij}^d(t')$ is determined from (9):

$$\mu_{ij}^d(t) = \mu_{ij}(t) \cdot \frac{\lambda_{ij}^d(t)}{\sum_d \lambda_{ij}^d(t)}, \quad t = t + T_{ij}(t).$$

Since the flow conservation must be satisfied at node i , the following result is obtained from(6):

$$\sum_j \lambda_{ij}^d(t) = q_{id}(t) + \sum_k \mu_{ki}^d(t), \tag{18}$$

where, $q_{id}(t) = dQ_{id}(t)/dt$ (given), $i=1, 2, \dots, N$, $i \neq d$.

The total arrival rate $\sum_j \lambda_{ij}^d(t)$ can be known because the right hand side of (18) has been evaluated but individual arrival rate $\lambda_{ij}^d(t)$ must be determined through the DUO assignment based on link travel times estimated below. Since the minimum of link travel time is l_{ij} / v_{ij} , link travel times at time t is estimated using the departure flow rate at present time t :

$$\begin{aligned} T_{ij}(t) &= D_{ij}^{-1}(A_{ij}(t)) - t, \\ &\cong \text{Max} [l_{ij} / v_{ij}, \{A_{ij}(t) - D_{ij}(t)\} / \mu_{ij}(t)]. \end{aligned} \tag{19}$$

Using the estimated link travel times $T_{ij}(s)$'s, the shortest route from node i to destination d can be determined without difficulty by a standard shortest route algorithm. Even if there are two or more equally shortest routes from node i to d , the total rate of $\sum_j \lambda_{ij}^d(t)$ could be loaded onto one of the shortest routes in order to establish the DUO assignment principle by definition. As the result, $\lambda_{jd}(t)$ for $\forall (i,j)$ and $\forall d$ is determined at time t .

5.2 A Solution Algorithm

First, the time axis is divided into small intervals of equal length Δt . The arrival and departure rates of link (i,j) , $\lambda_{ij}^d(t)$ and $\mu_{ij}^d(t)$, are assumed constant during $[t, t+\Delta t)$.

step 1: Initialize link flow rates, cumulative curves, link travel times and present time.

$$\begin{aligned} \lambda_{ij}^d(t) &= \lambda_{ij}^d(0), & t < 0, & \forall (i,j), & \forall d, \\ \mu_{ij}^d(t) &= \mu_{ij}^d(0), & t < 0, & \forall (i,j), & \forall d, \\ A_{ij}^d(t) &= A_{ij}^d(0), & t < 0, & \forall (i,j), & \forall d, \\ D_{ij}^d(t) &= D_{ij}^d(0), & t \leq 0, & \forall (i,j), & \forall d, \\ T_{ij}(t) &= T_{ij}(0), & t \leq 0, & \forall (i,j), \\ t &= 0. \end{aligned}$$

研究速報

- Set Δt as $\Delta t \leq \underset{(i,j)}{\text{Min}} \ell_{ij} / v_{ij}$.
- step 2: Determine departure rates $\mu_{ij}(t)$ and $\mu_{ij}^d(t)$ from (16) and (9).
- step 3: Estimate link travel time $T_{ij}(t)$ from (19).
- step 4: Determine the total arrival rate at node i for $[t, t+\Delta t)$, $\sum \lambda_{ij}^d(t) \cdot \Delta t$, based on (18).
- step 5: Find the shortest path from node i to destination d based on the estimated link travel time $T_{ij}(t)$ and determine $\lambda_{ij}^d(t) \cdot \Delta t$ by loading $\sum \lambda_{ij}^d(t) \cdot \Delta t$ onto a link starting from node i on the shortest path as shown in Fig. 4: if link (i,j) is on the shortest path, $\lambda_{ij}^d(t) \cdot \Delta t = \sum \lambda_{ij}^d(t) \cdot \Delta t$, otherwise zero.
- step 6: Extend $A_{ij}^d(\cdot)$ and $D_{ij}^d(\cdot)$ from time t to $t+\Delta t$ by straight lines with slopes $\lambda_{ij}^d(t)$ and $\mu_{ij}^d(t)$ respectively as shown in Fig. 4.
- step 7: If $T_{ij}(t) > \ell_{ij} / v_{ij}$ (a queue exists on link (i,j)), extend $D'_{ij}^d(\cdot)$ by shifting $D_{ij}^d(t)$, $t < t' \leq t + \Delta t$, horizontally by $-\ell_{ij} / v'_{ij}$ and vertically by $k^{max}_{ij} \ell_{ij}$ as in Fig.4.
- step 8: Update *Back-Up-Flag*_{ij}, which indicates whether a queue backs up to the upstream link: if $A_{ij}^d(t+\Delta t) \geq D'_{ij}^d(t+\Delta t)$, *Back-Up-Flag*_{ij} = 1; otherwise zero.
- step 9: Update present time as $t := t+\Delta t$ and return to step 2.

In step 1, the small time interval Δt is set such that $\Delta t \leq \underset{(i,j)}{\text{Min}} \ell_{ij} / v_{ij}$ because of the following reason. To determine departure rate in step 2, the backward wave generated at the downstream end of link (i,j) at time t should not reach the upstream end before $t + \Delta t$: $\Delta t \leq \underset{(i,j)}{\text{Min}} - \ell_{ij} / v'_{ij}$. If the wave reaches before $t + \Delta t$, departure rates of upstream links cannot be evaluated for $[t, t+\Delta t)$. Also, Δt should not be larger than the link travel time because departure rate $\mu_{ij}^d(t)$ must be determined for $t \leq t' < t + \Delta t$ based on $\lambda_{ij}^d(t')$, $t' < t$: $\Delta t \leq \underset{(i,j)}{\text{Min}} \ell_{ij} / v_{ij}$. Normally, wave speed in free flow region v_{ij} is larger than $-v'_{ij}$, we obtain the constraint $\Delta t \leq \underset{(i,j)}{\text{Min}} \ell_{ij} / v_{ij} < \underset{(i,j)}{\text{Min}} - \ell_{ij} / v'_{ij}$.

In step 3, link travel time $T_{ij}(t)$ is estimated by extending $D_{ij}^d(\cdot)$ by a straight line with slope $\mu_{ij}^d(t)$ as shown in Fig. 3. The estimated travel time is based on the departure rate during $[t, t+\Delta t)$, and hence the estimate may be different from the actual travel time experienced by a vehicle entering the link at time t .

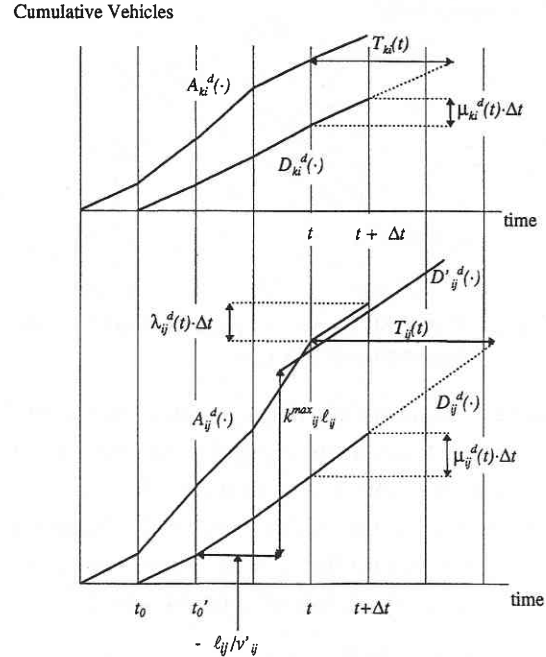


Fig. 3 Construction of Cumulative Arrival and Departure Curves on link (i,j) .

6. Summary and Future Research Needs

Given time dependent many-to-many OD volumes, we first discuss the formulation of the assignment so as to satisfy the flow conservation and the First-In-First-Out queue discipline. Then, defining the optimal condition, we extend the discussion with point queues to one with physical queues based on the kinematic wave theory by Newell.

(Manuscript received, May 8, 1996)

References

- 1) Kuwahara M. and Akamatsu T. : Dynamic Equilibrium Assignment with Queues for a One-to-Many OD Pattern, the proceedings of 12th International Symposium on Transportation and Traffic Theory, pp.185-204, Elsevier, Berkeley, (1993).
- 2) Akamatsu T. and Kuwahara M. : Dynamic User Equilibrium Assignment on Oversaturated Road Networks for a One-to-Many / Many-to-One OD Pattern, Proc. of JSCE, No. 488, 21-30 (1994).
- 3) Newell G.F. : A Simplified Theory of Kinematic Waves in Highway Traffic, Part II: General Theory, Transportation Research, Vol.27B, No.4, pp.289-304 (1993).